


JD4-54.0KW (50 Hertz)

Standard Features

- Single bearing brushless generator
- +/- 1% Solid-state voltage regulation
- Low 1,500 RPM operating speed
- Automatic engine shutdown for low oil and high coolant temperature
- Freshwater heat exchange cooling
- Zinc anode in heat exchanger
- Water-cooled manifold and Stainless Steel exhaust elbow
- Direct drive seawater pump
- Primary fuel filter
- Secondary fuel filter
- Air intake Cleaner / Silencer
- 12-Volt starting
- 12-Volt battery charging alternator
- 4-Point isolation motor
- Awl-Craft 2000 urethane finish
- 5-Year Limited Warranty

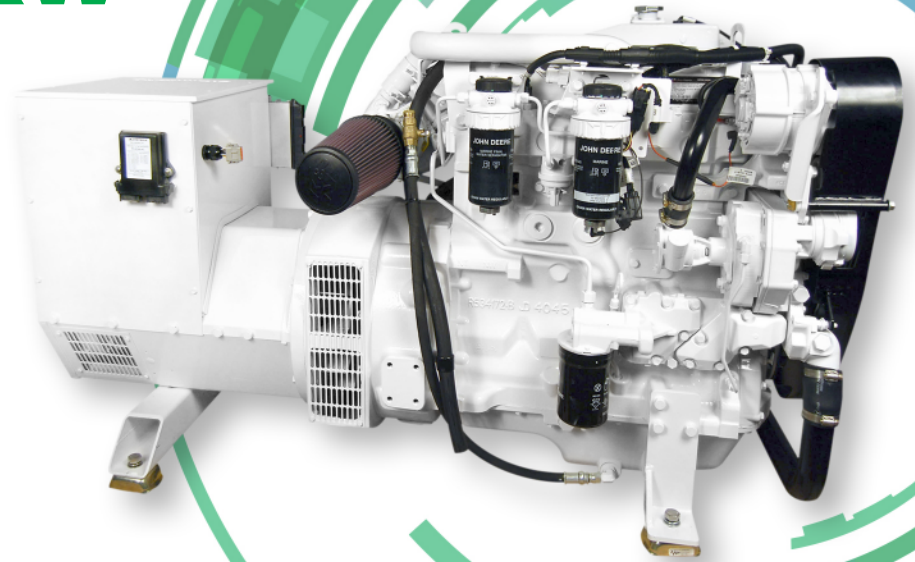

Specifications

Model	JD4-54.0
Engine	John Deere 4045TFM
Cu. In. Displacement	276
Bore x Stroke	4.19 x 5.00 (in.)
Dims (LxWxH)	65 x 32 x 38 (in.)
Enclosure Dims (LxWxH)	68.5 x 34.5 x 41 (in.)
Weight (lbs.)	2375
Output (volts)	380 Single phase
Output (amps)	171
Output (watts)	54,000
Fuel Consum. @ 50% load	2.6 GPH
Fuel Consum. @ 100% load	4.8 GPH
Exhaust Dia.	3.5 in.

Specifications are subject to change without notice

Optional Equipment

- Remote Controls Including Electronic Control Panel With Display For All Engine And Generator Functions
- Three Phase Output
- 24-Volt DC Start
- Dedicated Motor Starting Generator Windings
- Stainless Steel Drip Pan
- Powder Coated Aluminum Enclosure
- Spare Parts Kit



2880 Hammondville Road • Pompano Beach, FL 33069
Ph: 954-979-5899 • Fax: 954-979-4349
info@phasormarine.com • www.phasormarine.com

rev112323