


K3-9.5KW

Standard Features

- Kubota Diesel Engine
- Single bearing direct coupled brushless generator
- +/- 1% Solid-state voltage regulation
- Low 1,800 RPM operating speed
- Safety shutdown system for high coolant temperature or low lube oil pressure
- Single series circuit control system with no printed circuit boards - tinned wiring
- Freshwater double pass heat exchanger
- Water-cooled exhaust manifold with removable intergral Cupro-Nickel heat exchanger core
- Zinc anode in heat exchanger
- Stainless Steel exhaust elbow cast
- Gear-driven raw water pump
- 4-Point isolation mounts S/S
- Molded blue silicone water hoses with Stainless Steel AWAB clamps
- Air intake Cleaner / Silencer
- Spin-on lube filter
- Secondary 5 Micron fuel filter
- Self-bleed fuel system
- USCG approved fuel lines
- Electric fuel transfer pump
- Forged brass oil drain valve with safety lock
- Awl-Craft 2000 urethane finish
- 5-Year Limited Warranty
- Belt guard
- Circuit breaker - main line
- 5-Year Limited Warranty

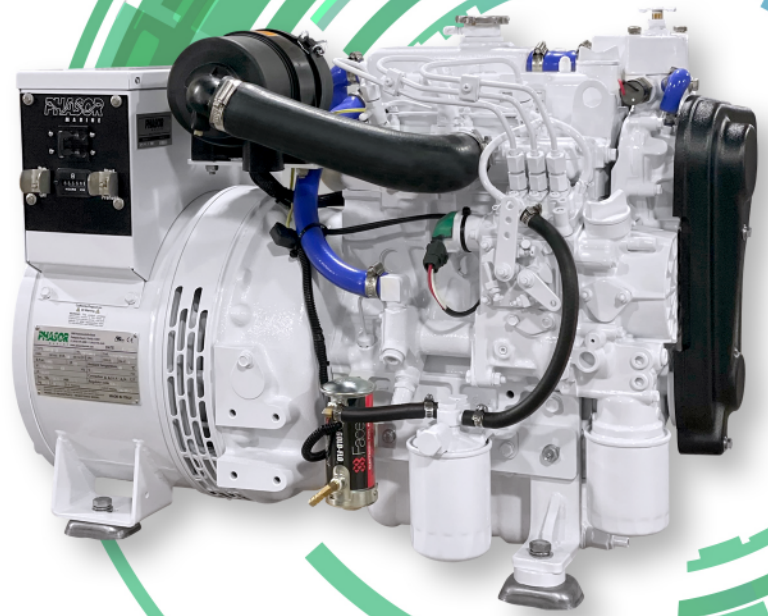

Specifications

Kubota Model	D1105-E4BG
Cylinders	3
Cu. In. Displacement	68.5
Bore x Stroke	3.07 x 3.09 (in.)
Dims (LxWxH)	31.5 x 18 x 23 (in.)
Enclosure Dims (LxWxH)	35 x 23 x 25.5 (in.)
Weight (lbs.)	462
Output (volts)	120/240
Output (amps)	80/40
Output (watts)	9,500
Exhaust Dia.	2 in.
Raw water Dia.	3/4 in.
Fuel Line Dia.	5/16 in.
Return Line Dia.	3/16 in.

Specifications are subject to change without notice

Optional Equipment

- Remote Start / Stop - 20ft. Harness
- DC Gauge Panel - 20ft. Harness
- Stainless Steel Drip Pan
- Three Phase Generator Output
- 24-Volt Starting System
- Sound Insulation Blanket
- Powder Coated Aluminum Enclosure
- Spare Parts Kit



2880 Hammondville Road • Pompano Beach, FL 33069

Ph: 954-979-5899 • Fax: 954-979-4349

info@phasormarine.com • www.phasormarine.com

rev112323