


# K3-11.0KW

## Standard Features

- Kubota Diesel Engine
- Single bearing direct coupled generator
- Low 1,800 RPM operating speed
- Safety shutdown system for high coolant temperature or low lube oil pressure
- Freshwater double pass heat exchanger
- Water-cooled exhaust manifold with removable intergral Cupro-Nickel heat exchanger core
- Zinc anode in heat exchanger
- Cast Stainless Steel exhaust elbow
- Gear-driven raw water pump
- 4-Point isolation mounts Stainless Steel
- Molded blue silicone water hoses with Stainless Steel AWAB clamps
- Air intake Cleaner / Silencer
- Closed crankcase breather system
- Spin-on lube and fuel filters
- Secondary 5 Micron fuel filter
- Self-bleed fuel system
- USCG approved fuel lines
- Electric fuel transfer pump
- Awl-Craft 2000 urethane finish
- Belt guard
- Circuit breaker
- Start / Stop / Preheat / Hourmeter
- 5-Year Limited Warranty

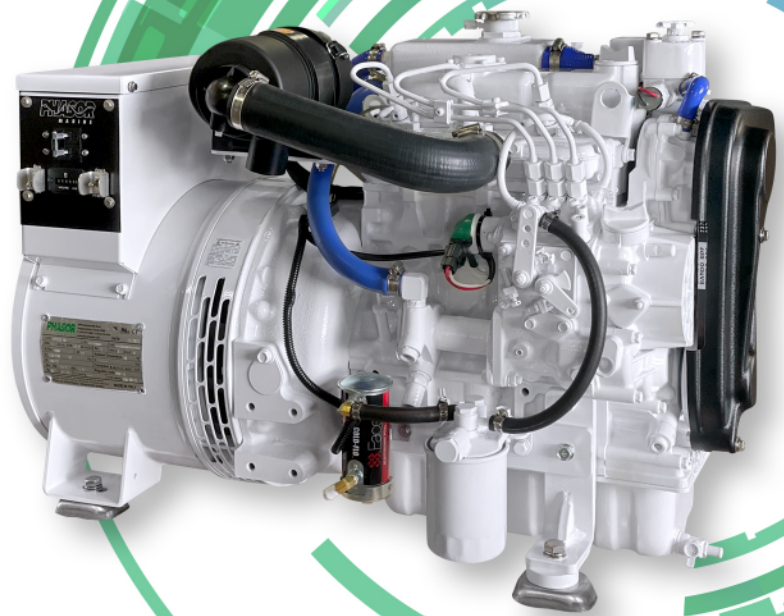

## Specifications

<b>Kubota Model</b>	<b>D1305-E3BG</b>
<b>Cylinders</b>	<b>3</b>
<b>Cu. In. Displacement</b>	<b>76.96</b>
<b>Bore x Stroke</b>	<b>3.07 x 3.46 (in.)</b>
<b>Dims (LxWxH)</b>	<b>33 x 18 x 23.25 (in.)</b>
<b>Enclosure Dims (LxWxH)</b>	<b>38 x 23 x 25.5 (in.)</b>
<b>Weight (lbs.)</b>	<b>483</b>
<b>Output (volts)</b>	<b>120/240</b>
<b>Output (amps)</b>	<b>92.5/45.8</b>
<b>Output (watts)</b>	<b>11,000</b>
<b>Exhaust Dia.</b>	<b>2 in.</b>
<b>Raw water Dia.</b>	<b>3/4 in.</b>
<b>Fuel Line Dia.</b>	<b>5/16 in.</b>
<b>Return Line Dia.</b>	<b>3/16 in.</b>

*Specifications are subject to change without notice*

## Optional Equipment

- Remote Start / Stop - 20ft. Harness
- DC Gauge Panel - 20ft. Harness
- Stainless Steel Drip Pan
- Three Phase Generator Output
- 24-Volt Starting System
- Sound Insulation Blanket
- Powder Coated Aluminum Enclosure
- Spare Parts Kit



2880 Hammondville Road • Pompano Beach, FL 33069

Ph: 954-979-5899 • Fax: 954-979-4349

info@phasormarine.com • www.phasormarine.com

rev112323